





WATCH DIVISION

TECHNICAL DATA FOR MULTIFUNCTION MOVEMENT – CAL.7M05




Casing dimensions

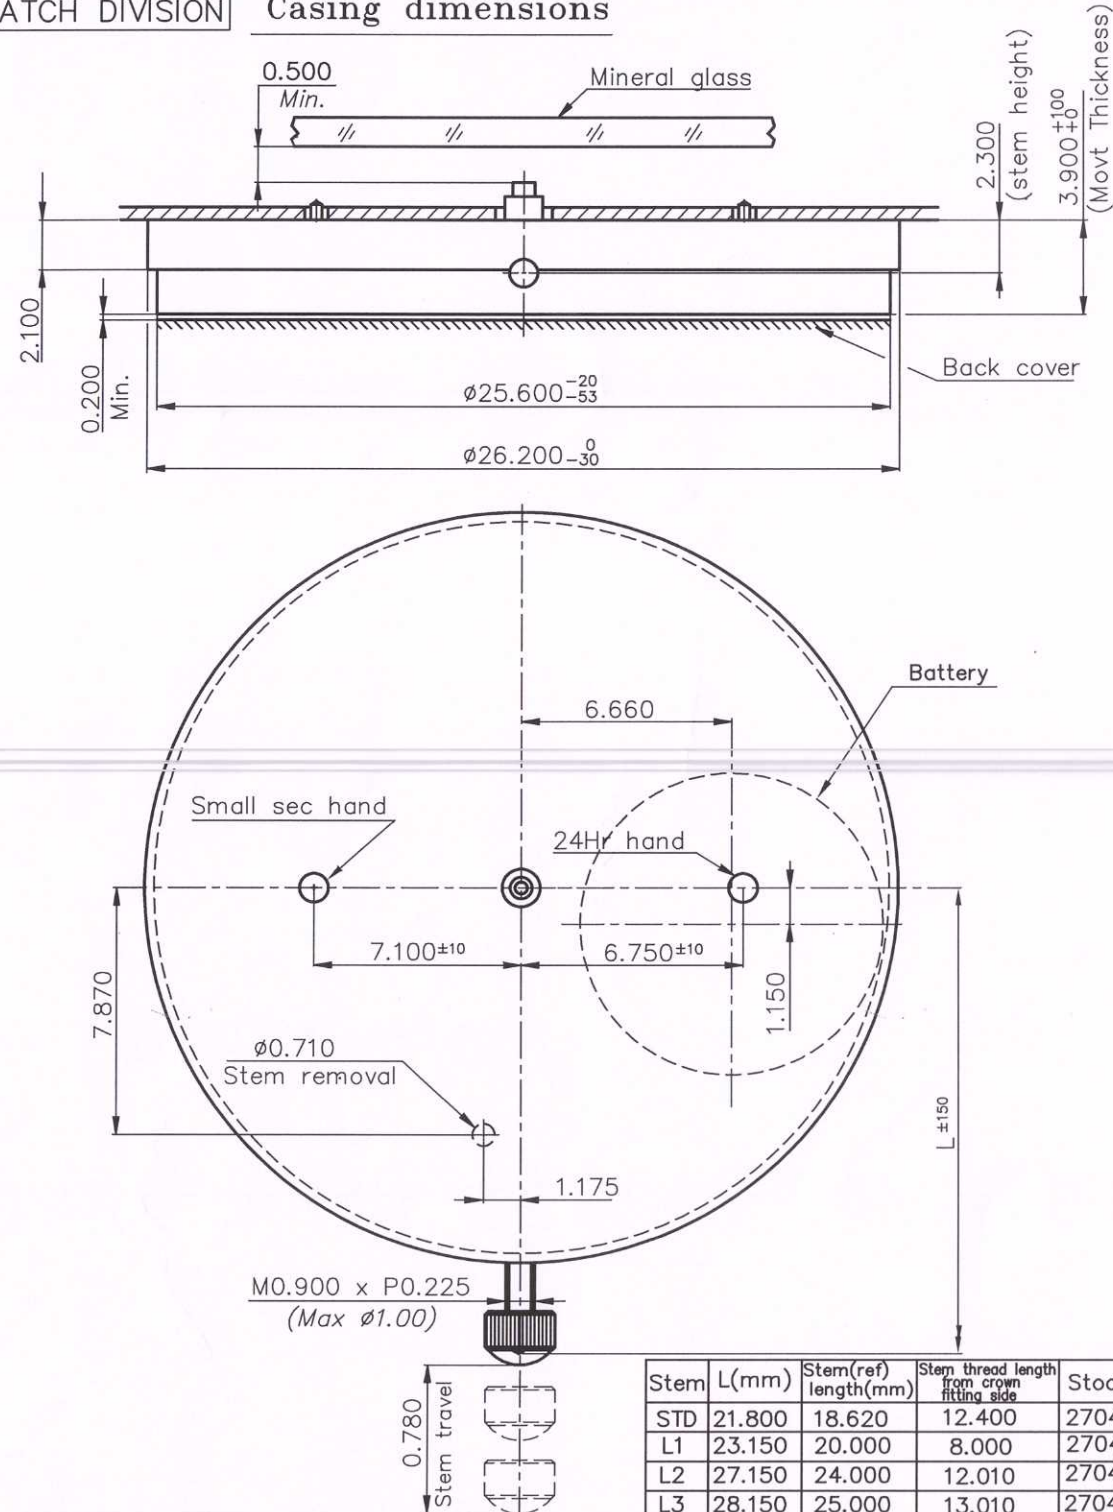


Dial details

Type A (STD version)

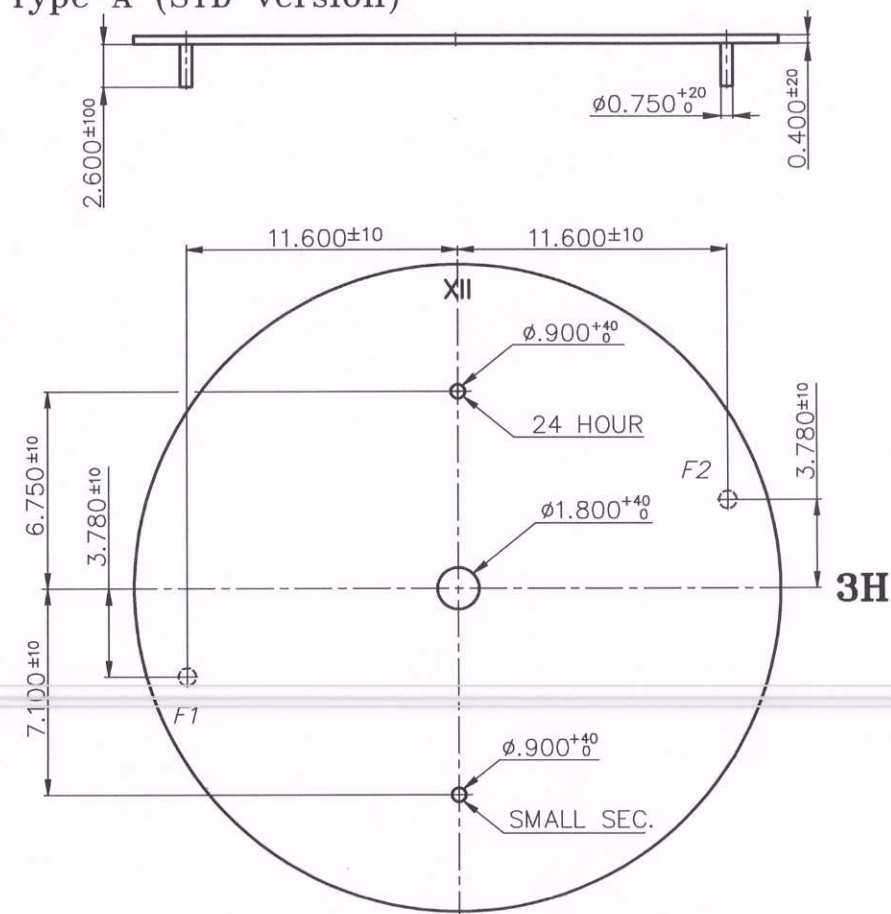


Hand fitting dimensions

Calibre	A	B	C
STD	1.200	1.600	0.750
H1	1.650	2.100	1.000

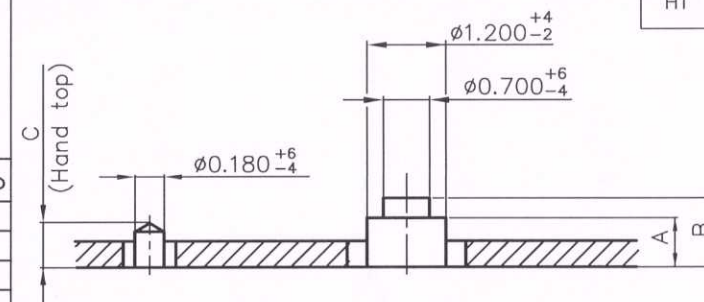


Hand details


Hour hand

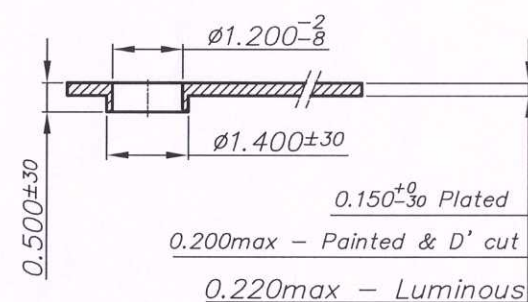

Minute hand

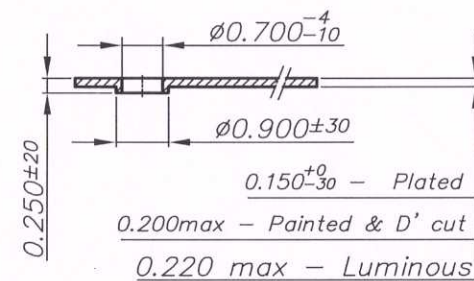

Offset 24Hr hand/ Offset sec hand

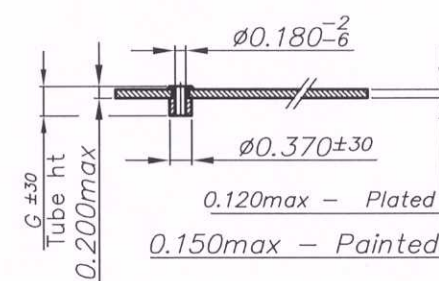

Calibre	G
STD	0.500
H1	0.750

Note: 1) All dimensions are in mm.

2) Tolerances in μ m.

3) Jewel Support – NA

4) Reset function available & Crown spacer to be used

Ind	Alterations	Date	Sign
c	Counter hand dial thick 0.600 was 0.400	18.06.19	RTMK
d	Hand fixing ht 1.000 was 0.750mm for H1		
d	Hands length details updated	3.10.19	RTMK
Name	Prepared	Checked	Approved
Date			

TITAN COMPANY LIMITED HOSUR 635 126

K: \Drawings\Tech data\TCL\7M05.dwg


Copy right of this drawing is owned and retained by Titan company Limited. Unauthorised use not permissible and a cognizable offence in the absence of permission from Titan company Limited.

T-2698 d
Sheet 1 of 2



WATCH DIVISION


TECHNICAL DATA FOR MULTIFUNCTION MOVEMENT – CAL.7M05




Dial details

* For other details refer dial type A

TYPE B (HIGH VERSION)

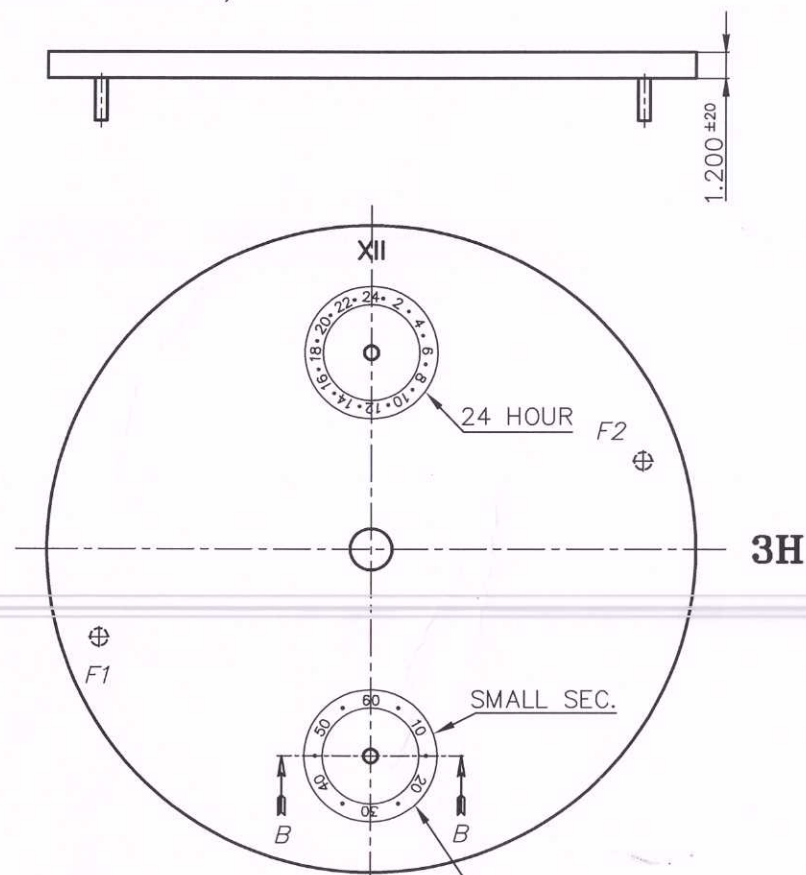

Diameter to be considered 0.500mm more than the Hand/Disc diameter for all eyes

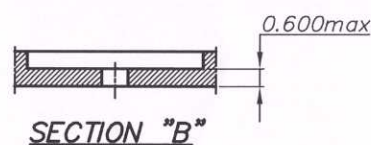

(section B is applicable for 24hr eye & small sec eye)

*NOTE:

- 1.Cal.7M05 High (H1) is for Embossed/Hybrid dial of 1.200mm(max.) thickness.
- 2.Stem height in case design to be followed according to the dial thickness.

Index	Alterations	Date	Sign
Prepared		Checked	Approved
Name			
Date			

TITAN COMPANY LIMITED HOSUR 635 126

T-2698 d

Sheet 2 of 2

K:\Drawings\Tech data\TCL\7M05.dwg

Copy right of this drawing is owned and retained by Titan company Limited. Unauthorised use not permissible and a cognizable offence in the absence of permission from Titan company Limited.