



Dial details

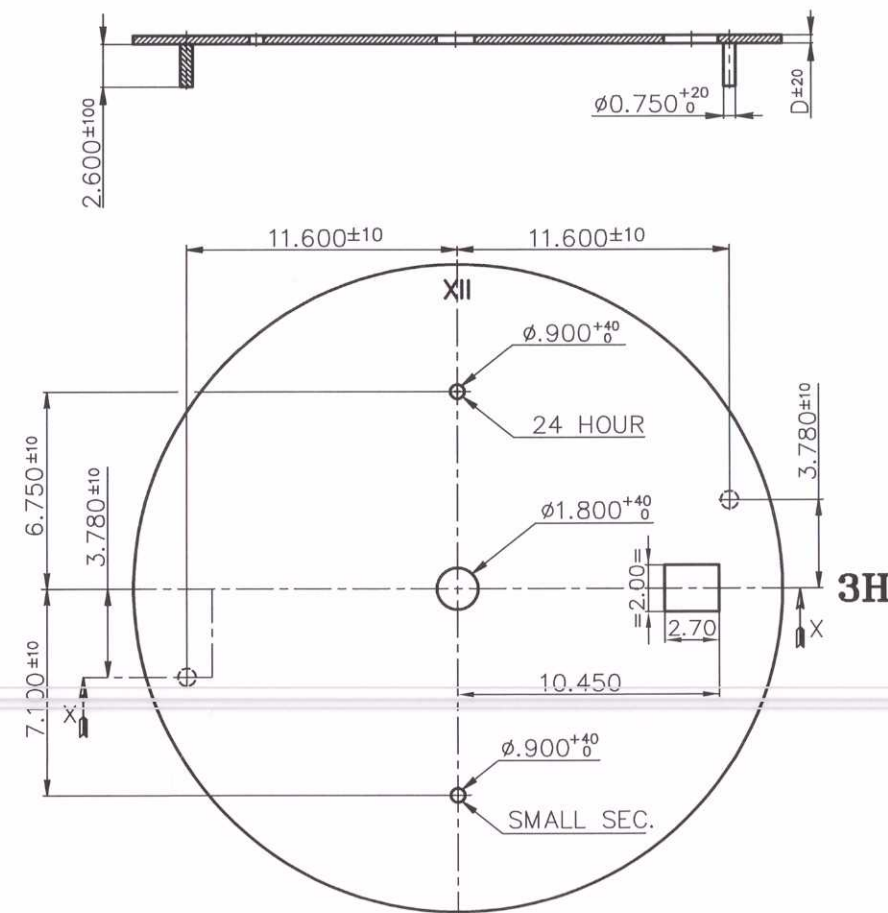


Calibre	A	B	C	D
STD	1.200	1.600	0.750	0.400

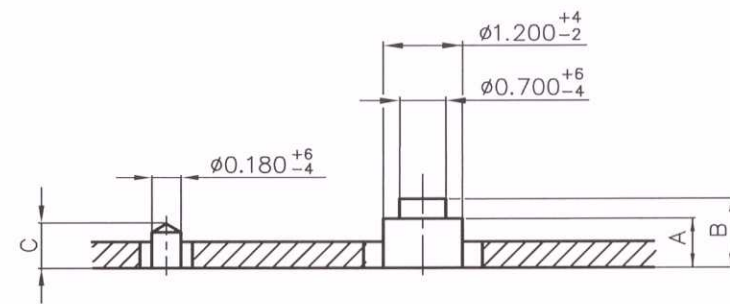

Stem	L(mm)	Stem(ref) length(mm)	Stem thread length from crown fitting side	Stock No
STD	21.800	18.620	12.400	2704153
L1	23.150	20.000	8.000	2704161
L2	27.150	24.000	12.010	2704162
L3	28.150	25.000	13.010	2704173

Hour hand

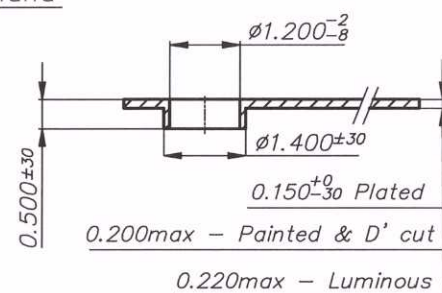

$\phi 0.700_{-0.10}^{-0.04}$
 $\phi 0.900_{\pm 0.30}$
 0.250 ± 0.20
 $0.150_{-0.30}^{+0.00}$ - Plated
 0.200_{max} - Painted & D' cut
 0.220_{max} - Luminous

0.500 ± 30
 Tube ht
 $\phi 0.180 \begin{smallmatrix} -2 \\ -6 \end{smallmatrix}$
 $\phi 0.370 \pm 30$
 0.120max - Plated
 0.150max - Painted

Movement size	11 1/2" (25.60 mm)
Functions	2 hands + 2 eyes + Date (Small sec at 6H/24Hr at 12H/Date at 3H)
Thickness	3.90 mm (including battery)
Stem height	2.30 mm
No. of jewels	03
Type of IC	C-MOS-LSI
Quartz frequency	32,768 Hz
Accuracy	±20 sec/month
Pulse rate	1 pulse per Second.
Coil resistance	2.90 k Ω
Current consumption	0.81uA(Typ) ~ 1.05uA(max)
Torque at Second hand	3.5 μ Nm(min) ~ 6.0 μ Nm(typ)

POWER CELL	Type		SR920SW	
	Size		ø9.5 x 2.1 mm	
	Voltage		1.55 V	
	Capacity		45 mAh	
	Life (theoretical)		60 months	
	Battery clamping		Positive (top clamp)	
HANDS	DESCRIPTION		MINUTE HAND	SMALL SEC HAND 24Hr HAND
	Imbalance mg.mm		60	6
	Inertia mg.mm ²		500	90
	Weight mg (max).		12	4.5
	Length mm(max)	Brass	13	3.5
		Dural	18	3.5

Note: 1) All dimensions are in mm.
2) Tolerances in μm .
3) Quick setting is provided for the date.
4) Jewel Support – NA
5) Reset function available & Crown spacer to be used

Ind	Alterations	Date	Sign
a	Consumption & cell life details updated	04.06.19	RTMK
	Hands details updated.		
	Prepared	Checked	Approved
Name			
Date	5/6/19	5/6/19	

TITAN COMPANY LIMITED HOSUR 635 126

Copy right of this drawing is owned and retained by Titan Company Limited. Unauthorised use not permissible and a cognizable offence in the absence of permission from Titan Company Limited.

K: \Drawings\Tech data\TCL\7M06.dwg

—2699