

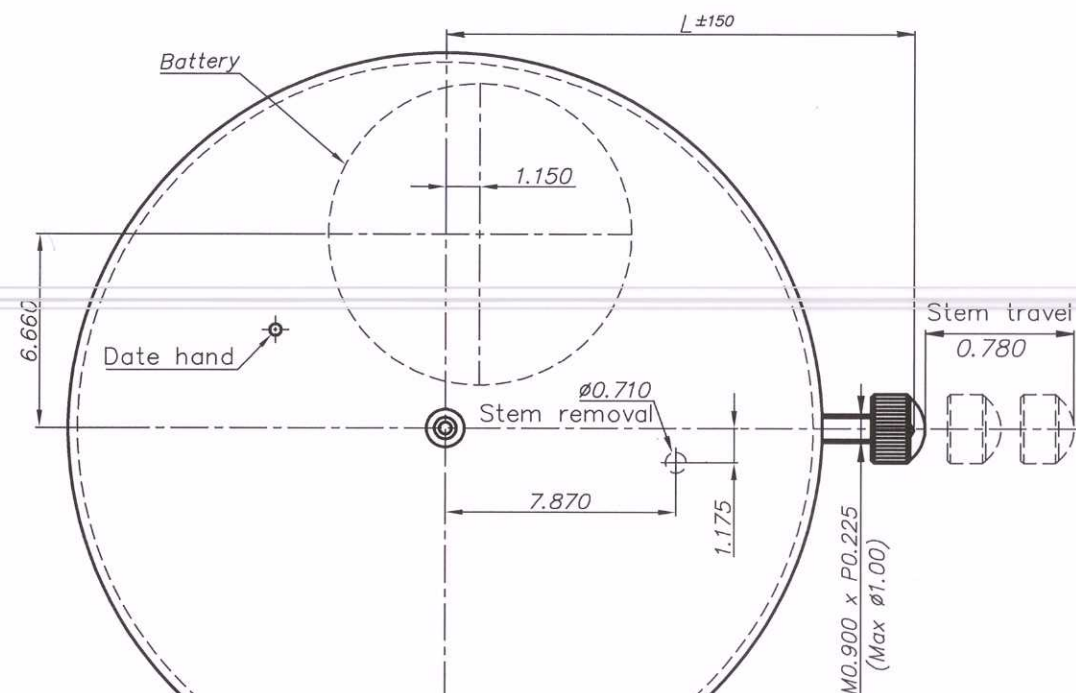


Casing dimensions

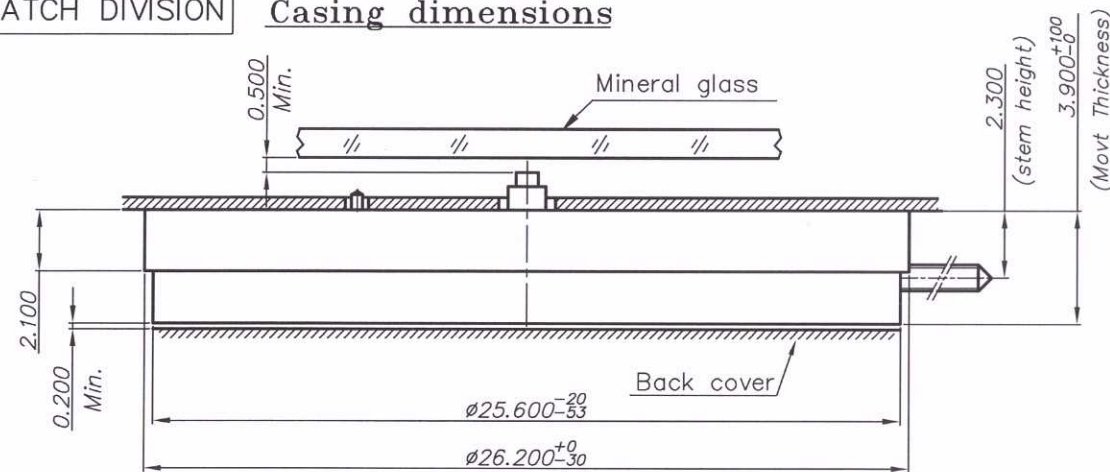

<i>Stem</i>	<i>L(mm)</i>	<i>Stem(ref)</i> <i>length(mm)</i>	<i>Stem thread length</i> <i>from crown</i> <i>fitting</i> <i>side</i>	<i>Stock No</i>
<i>STD</i>	<i>21.800</i>	<i>18.620</i>	<i>12.400</i>	<i>2704153</i>
<i>L1</i>	<i>23.150</i>	<i>20.000</i>	<i>8.000</i>	<i>2704161</i>
<i>L2</i>	<i>27.150</i>	<i>24.000</i>	<i>12.000</i>	<i>2704162</i>
<i>L3</i>	<i>28.150</i>	<i>25.000</i>	<i>12.000</i>	<i>2704173</i>


Type A (STD version)

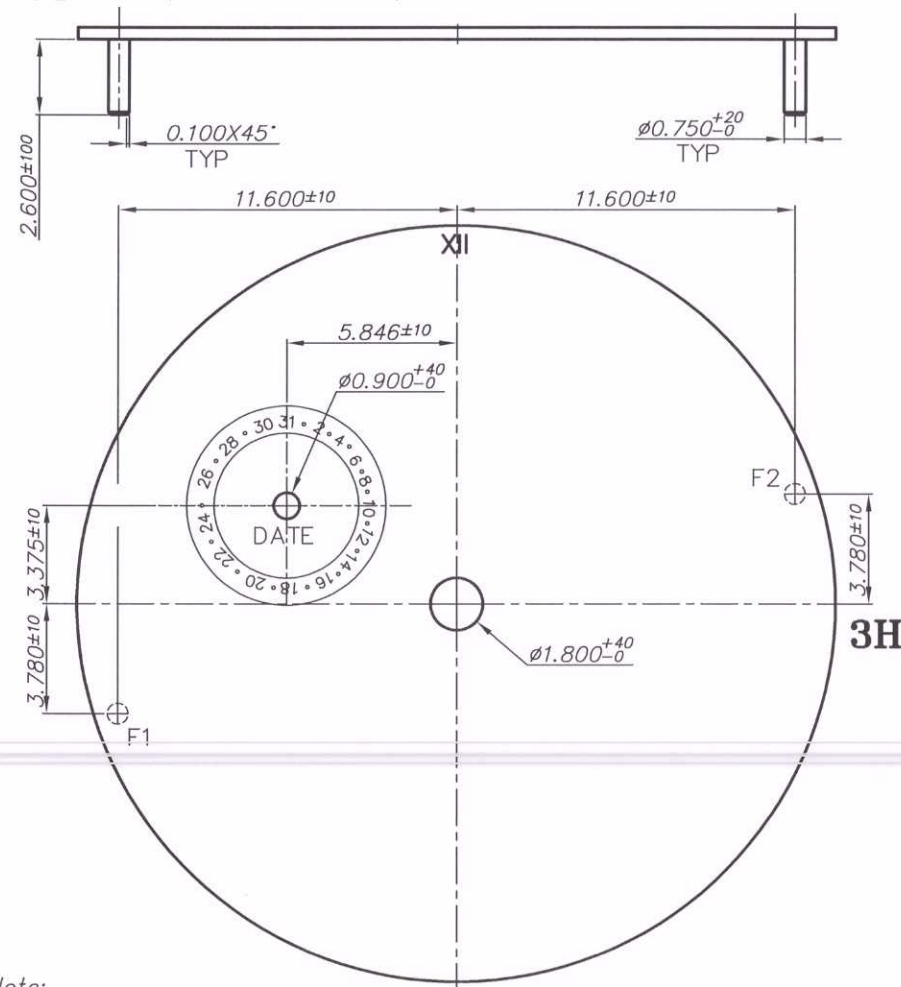

1. H1 Version is for Embossed/Hybrid dial of 1.200mm(max.) thickness
2. Stem height in case design to be followed according to the dial thickness
3. Dial diameter @ counters to consider 0.500mm more than the hand length

Hand fitting dimensions


<i>Cal</i>	<i>A</i>	<i>B</i>	<i>E</i>	<i>D1</i>	<i>D2</i>
<i>STD</i>	1.200	1.600	0.750	0.800	0.400
<i>H1</i>	1.650	2.100	1.000	1.200	0.600

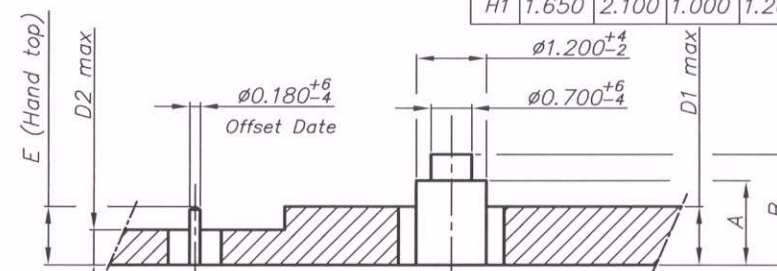


Note: Hands clearance should be qualified against "hand usage chart" (Length & Thick)

Hand details


Hour hand

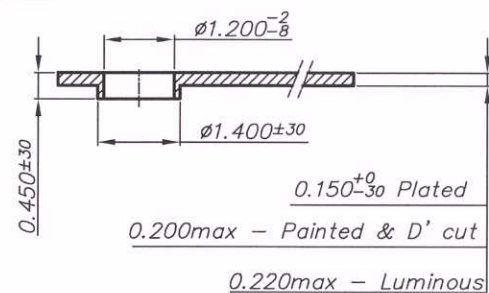

Minute hand

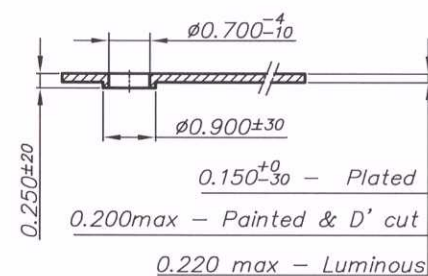

Offset Date Hand

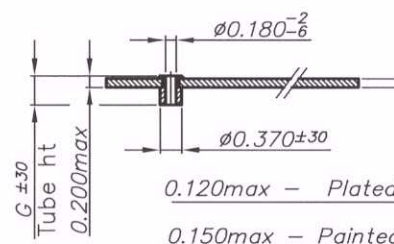

<i>Calibre</i>	G
<i>STD</i>	0.50
<i>H1</i>	0.75

<i>Movement size</i>	11 1/2''' (25.60 mm)
<i>Functions</i>	2 hands + 1 eye (Date at 10H)
<i>Thickness</i>	3.90 mm (including battery)
<i>Stem height</i>	2.30 mm
<i>No. of jewels</i>	01
<i>Type of IC</i>	C-MOS-LSI
<i>Quartz frequency</i>	32,768 Hz
<i>Accuracy</i>	±20 sec/month
<i>Pulse rate</i>	1 pulse per Second.
<i>Coil resistance</i>	2.90 k Ω
<i>Current consumption</i>	0.81 μ A(Typ) ~ 1.05 μ A(max)
<i>Torque at Second hand</i>	3.5 μ Nm(min) – 6.0 μ Nm(Typ)

POWER CELL

Type	SR920SW (SII)
Size	Ø9.5 x 2.1 mm
Voltage	1.55 V
Capacity	46 mAh
Life (theoretical)	60 months
Battery clamping	Positive (top clamp)

HANDS

DESCRIPTION		MINUTE HAND	DATE HAND
Imbalance mg.mm		60	6
Inertia mg.mm ²		500	90
Weight mg (max).		12	4.5
Length mm(max)	Brass	14.5	4.5
	Dural	17.5	4.5

Note: 1) All dimensions are in mm.
2) Tolerances in μm .
3) Quick setting is provided for the Date.
4) Jewel Support: NA
5) Reset function available & Crown spacer to be used

Ind	Alterations	Date	Sign

	Prepared	Checked	Approved
Name			
Date		27/08/20	27/08/20

TITAN COMPANY LIMITED HOSUR 635 126

Copy right of this drawing is owned and retained by Titan company Limited. Unauthorised use not permissible and a cognizable offence in the absence of permission from Titan company Limited.

K: \Drawings\Tech data\Tech Data\TCL\7M5X.dwg

T-3085	-
--------	---

Sheet 1 of 1