





WATCH DIVISION


TECHNICAL DATA FOR TITAN SLIM DATE-3H+DATE (T9031)



Casing dimensions

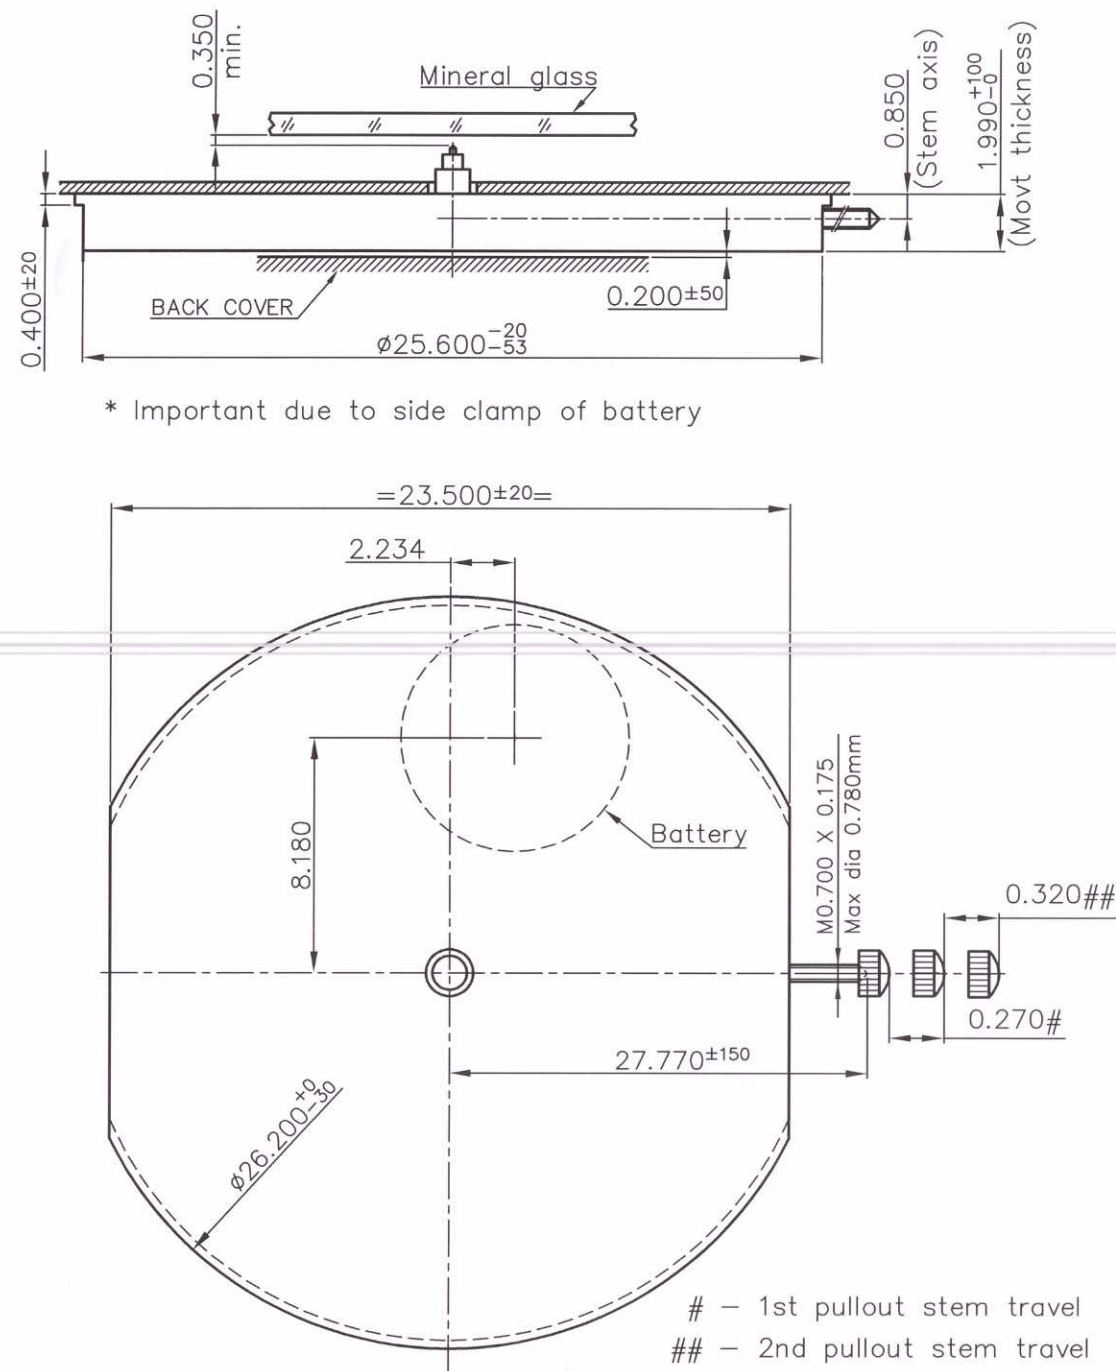

Dial details

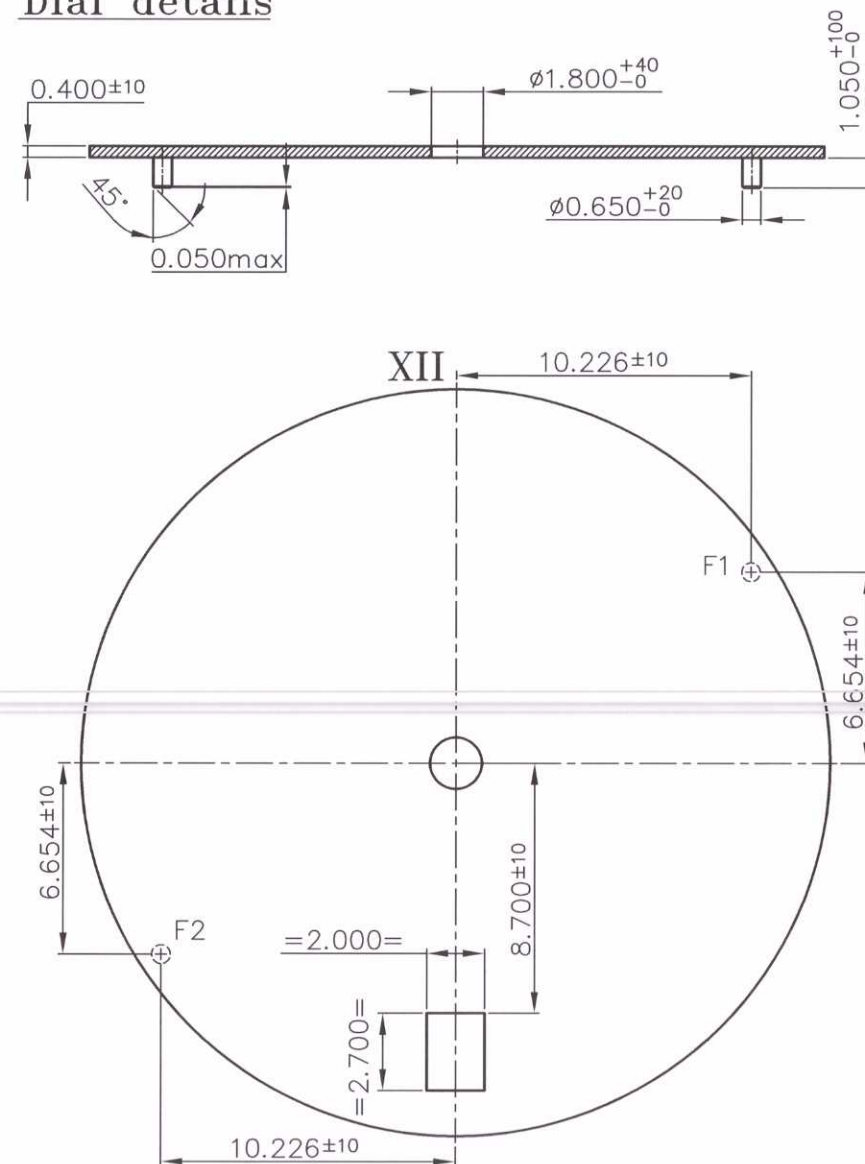

Stem	L(mm)	Stem(ref) Length(mm)	Thrd.length from crown	Stock No
STD	22.770	20.050	9.690	2733153
L1	25.720	23.000	10.000	2733170
Crown spacer		Hands Fixing Support	Reset function	
Required		Required	Available	

Movement size	11 1/2" (Ø25.60 x 23.50mm)
Functions	Three hands + Date
Thickness	1.99mm (Including battery)
Stem height	0.850 mm
No. of jewels	5
Type of IC	C-MOS-LSI (Philips IC)
Quartz frequency	32,768 Hz
Accuracy	±18 sec/month
Pulse rate	1 pulse per second
Coil resistance kΩ	2.150 (Typ.)
Current consumption - μA	0.60(Typ)~0.70(max)
Torque at Sec. hand - μNm	3.90(min)~5.0(Typ)
Effective temperature range	0 to +55°C


POWER CELL	Type	SR714SW
	Size	Ø7.9 X t 1.450 mm
	Voltage	1.55 V
	Capacity	15 mAh
	Life (theoretical)	32 Months
	Battery clamping	Side Clamp

HANDS	DESCRIPTION		MINUTE HAND	SECOND HAND
	Imbalance mg.mm		60	6
	Weight mg (max).		10	4.5
	Length mm (max)	Brass	13	13


Notes :

- All dimensions are in mm.
- Tolerances in μm.


Hand fitting dimensions

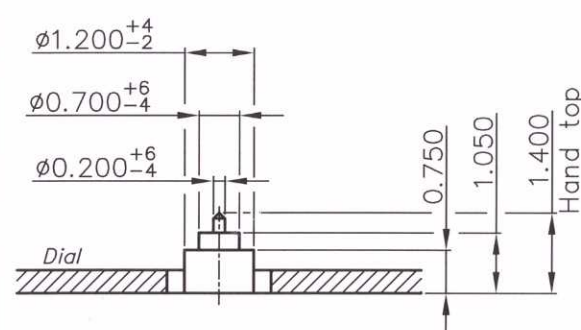


Hour hand

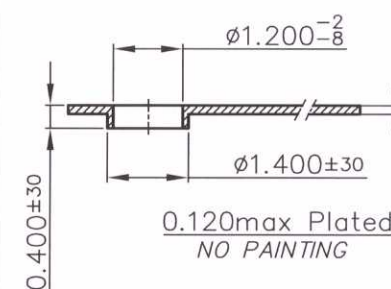

Minute hand

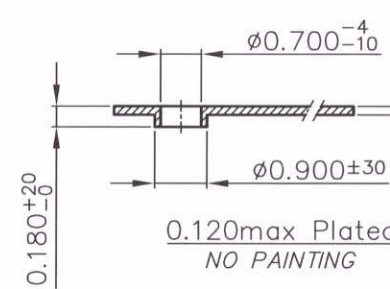

Second hand

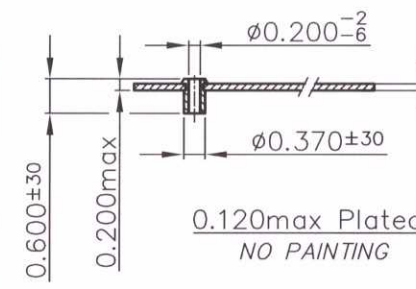

Index	Alterations	Date	Sign
a)	Hands details updated, second hand top 1.400 was 1.340	30.5.18	SK
b)	Stem details added	12.03.19	SK
c)	Cell life & Electrical details updated	22.02.20	SK
Prepared			
Checked			
Approved			
Name			
Date			